condato PRIME

LOAD CAPACITY 500 KG

Condato Prime lift is blending of classic design with simplicity. Made with passion for safety and functionality. Prime offers platform sizes from 1100-1600 mm, a travel height of 15 meters and a solid load capacity of 500 kg.









RATED LOAD I 500 kg

HEIGHT LIMITS Max travel height 15 m Top height 2.3 m

STOPS Max 5 stops



DRIVE SYSTEM

Screw and nut

CONTROL SYSTEM I PLC



PLATFORM BUTTONS

Automatic Run All buttons with tactile and braille

CERTIFICATION I MD 2006 / 42 / EC



RATED SPEED | Max 0.15 m/sec

BATTERY
EMERGENCY
LOWERING
incl. as standard

MOTOR 2.2 kW

PIT DEPTH I 50 mm



POWER SUPPLY 230/380 V 1/3-phase 50/60 Hz 16A, frequency converter


MANUFACTURED IN SWEDEN



Office: O2 136 7823-24 Mobile: O62 871 9465 / O96 923 6040 Line: condatolift sales@condato.co.th www.condato.co.th



OPTIONS

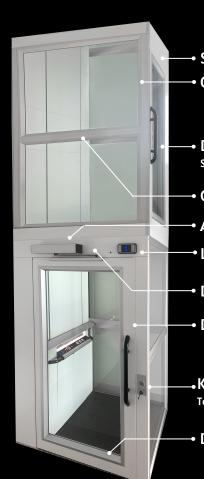

Shaft Panels Color

Corner Profile Color

Automatic Door Opener (optional)

Door Handle, 30 cm Black painted (standard) Stainless steel (optional)

Door Handle Color Stainless steel


Glass Frame Color

Automatic Door Opener

Level Indicator

Door Frame Color

Door Blade Color



Ramp (optional)

If the lift is installed without a pit, a ramp is required according to the EN81.41.

Key Control with Buttons

To lock the calling button for prevent unauthorized person use.

Door Window Frame Color



Level Indicator (optional) Digital display that indicates which floor the lift is currently standing on.



2-Way Communication System (optional)

All Condato lifts except Condato Mini are able to install a 2-way communication system which allows access from inside and outside the lift in case of emergency.





Half Door - Top Floor (optional)

0702 (Black Rubber)

0733



(Choose between 20 different colors)

LIFT COLOR



High Back Platform (optional)



Standard RAL 9003

optional















